

STILEX SPORTS


TECHNICAL DATA	STANDARD	FLEX 4500	FLEX 6000	FLEX 8000
PRODUCT DESCRIPTION				
Total thickness	EN 428	4.5mm	6.0mm	8.0mm
Roll width	EN 426	1.5m / 1.8m	1.5m / 1.8m	1.5m / 1.8m
Roll length	EN 426	20.0m	20.0m	20.0m
Weight	EN 430	3.2kg/m ²	4.5kg/m ²	5.6kg/m ²
PRODUCT DESCRIPTION				
Shock absorption	EN 14808	21%	31%	36%
Sliding coefficient	DIN 18032	0.4 - 0.6	0.4 - 0.6	0.4 - 0.6
Energy return	NF P 90 203	≥0.31	≥0.31	≥0.31
Ball bounce	EN 12235	≥90%	≥90%	≥90%
Vertical deformation	EN 14809	≤3.5mm	≤3.5mm	≤3.5mm
PRODUCT DESCRIPTION				
Abrasion resistance	EN ISO 5470-1	≤350mg	≤350mg	≤350mg
Impact resistance	EN 1517	≥8	≥8	≥8
Indentation Resistance	EN 433	≤0.5mm	≤0.5mm	≤0.5mm
Fire resistance	EN 13501-1	Cr-s1	Cr-s1	Cr-s1
Light resistance	EN 20 105-B02	>6	>6	>6
Chemical resistance	EN 423	excellent	excellent	excellent
Dimensional stability	EN 434	<0.1%	<0.1%	<0.1%
Anti-bacterial	---	yes	yes	yes
Sound isolation	EN ISO 717/2	21dB	22dB	24dB



IMPORTED BY : RAJ AGENCIES, MUMBAI
www.stilex.in



STILEX SPORTS

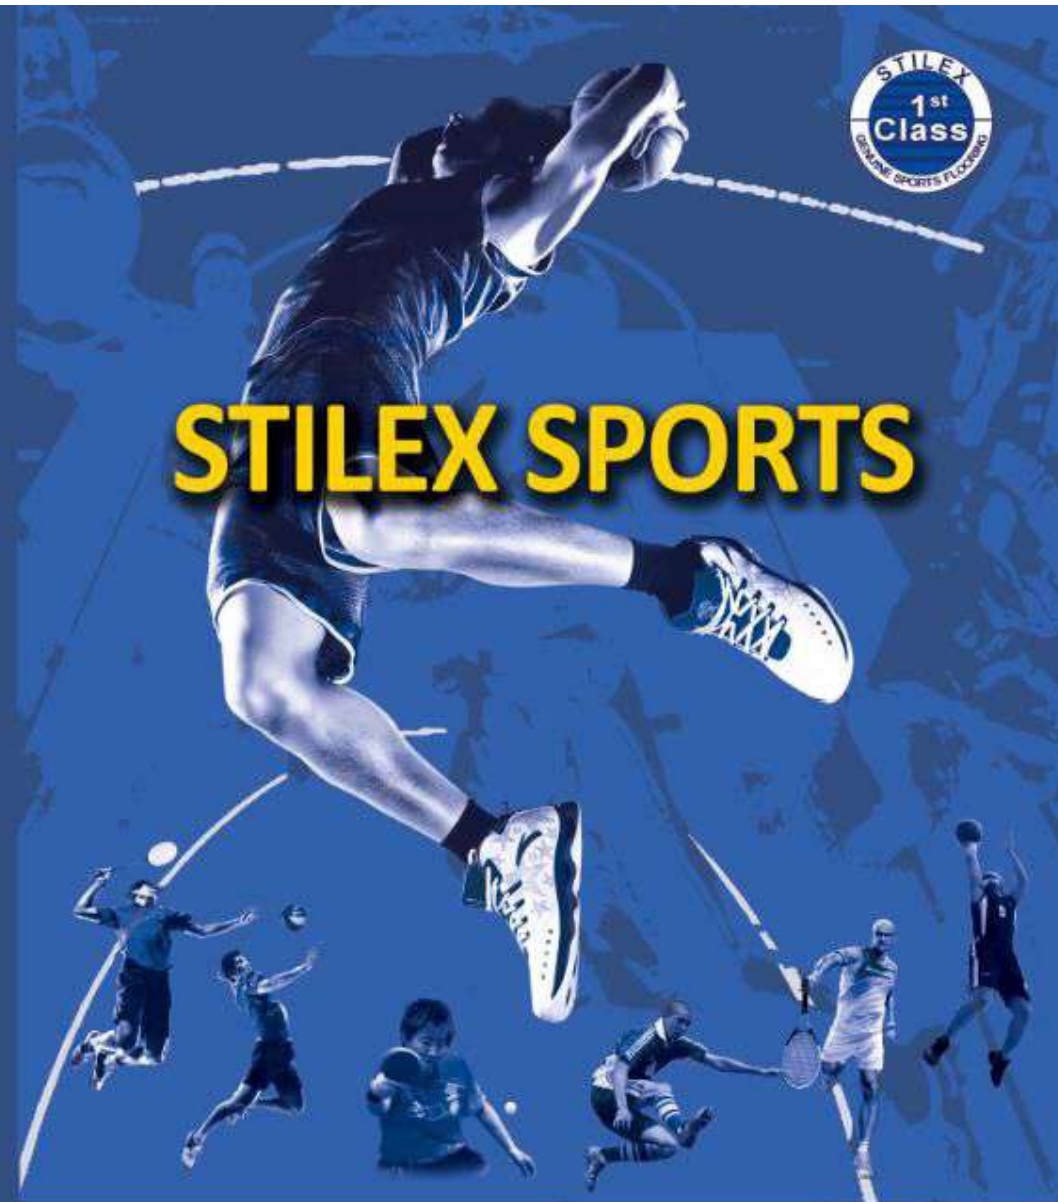

STILEX SPORTS

STILEX

STILEX SPORTS

SOLID COLOR



Mint Green 6602



Orange 6901



Red 6180




Blue 6401



Yellow 6205



Sky Blue 6403

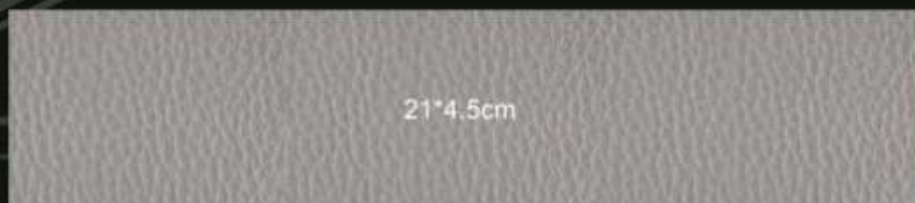


Grey 6303

STILEX SPORTS is available in both wood and solid colors.
This is a production sample, which may vary slightly in shade from the batch supplied.

STILEX SPORTS

WOOD

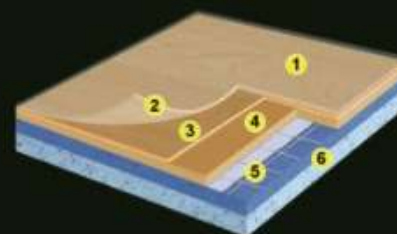

- 1 PUR coating
- 2 Durable wear layer
- 3 Printing layer
- 4 Compact layer
- 5 Reinforced fiberglass layers
- 6 Closed cell foam backing



Maple Wood 6381



Oak Wood 6357



Dark Wood 6305